

Big Projects Roof Maintenance

Before



After



East Top - 2nd



East Middle - 2nd




West - 1st

Before



After

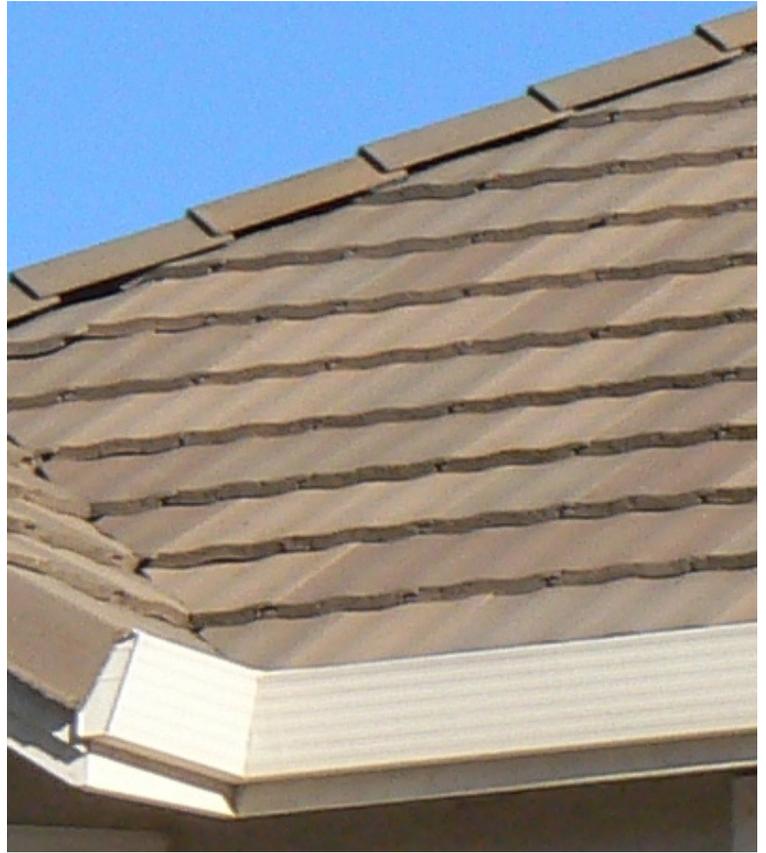

West Middle - 2nd



Burying Roof Anchor (West - 2nd)



Burying Roof Anchor (East - 2nd)



Skylight Fixed by Nails



Skylight Lid and the Basement



Skylight Completely Detached



Black Diamond Momentum Harness



Mad Rock Aviator Belay Device



Ridge-it Roof Anchor



Nonskid Shoes HyperV #1000



Complete Set of Roof Work Gear without Nonskid Shoes

The origin of the roof work gear I actually applied is the one for rock climbing, not the one dedicated for roof work.

I used "Rerouted Double Figure 8" to tie between the roof anchor and the belay device by rope. The belay device is attached to the harness through a screwlock carabiner. The harness is fitted on body and two thighs. A quickdraw and sling are used for changing working area flexibly and safely connecting the rope to both two roof anchors. To fix the standing position, I bound the rope to the screwlock carabiner several times.